




APC SBP16KP

APC Service Bypass Panel · Specification summary

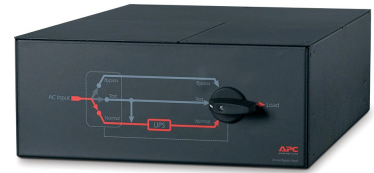

Rated voltage	200/208/240V
Rated current	100A
Bypass type	MBB
Input connection	Hardwire
Output connection	Hardwire
Main Input Voltage	200 V, 208 V, 230 V, 480 V 3 phase
Product or Component Type	Bypass kit
Main Output Voltage	120 V, 200 V, 208 V, 230 V
Other Output Voltage	220 V, 240 V
Output connector type	Hard Wire 3-wire (H N + E) for 1 zone(s), Hard Wire 3-wire (2PH + G) for 1 zone(s), Hard Wire 4-wire (2PH+N+G) for 1 zone(s)
Number of rack unit	4U
Number of cables	1
Provided Equipment	Installation guide, Rack Mounting brackets, User Manual
Range of Product	Maintenance Bypass Panels
Color	Black
Height	7.008 in (178 mm)
Width	17.008 in (432 mm)
Depth	26.0 in (660 mm)
Net Weight	47.09 lb(US) (21.36 kg)
Mounting Location	Front
Mounting preference	Lower
Mounting Mode	Rack-mounted
Input Frequency	50/60 Hz
Number of input connectors	1 Hard Wire 3-wire (H N + E), 1 Hard Wire 3-wire (2PH + G), 1 Hard Wire 4-wire (2PH+N+G), 1 Hard Wire 5-wire (3PH + N + G)
permissible voltage	200...240 V
Max line current	100 A
Input current limits	100 A
Load Capacity	20000 VA
Power factor	0...1

Max current draw	100 A
Protection Type	Circuit breaker
Ambient Air Temperature for Operation	-4...122 °F (-20...50 °C)
Relative Humidity	0...95 %
Operating altitude	0...15000 ft
Ambient Air Temperature for Storage	-40...149 °F (-40...65 °C)

Specifications are summarised from the manufacturer's published information (checked 2026-10-26). They describe the cited version only. Confirm the exact model, suffix and supplied revision before ordering. ISD confirms supply, price, availability and warranty separately.

IS Distributions Sdn. Bhd., Kuching, Sarawak · <https://www.isdsb.com.my/product-apc-power-sbp16kp.html>