
D-Link DLA-X301

D-Lite Cloud-Managed AX3000 Access Point · Specification summary

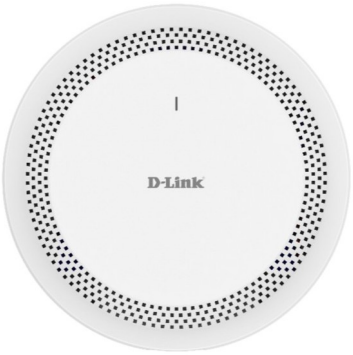

Device Interfaces	1 × 10/100/1000 Mbps Ethernet port, 1 × 10/100/1000 Mbps Ethernet PoE port
Wi-Fi Standard	IEEE 802.11ax (Wi-Fi 6); IEEE 802.11a/b/g/n/ac/ax
Data Signal Rate	2.4 GHz: up to 574 Mbps; 5 GHz: up to 2402 Mbps
Antenna	Internal omni-directional: 2 × 3 dBi 2.4 GHz, 2 × 3 dBi 5 GHz
Maximum Output Power	2.4 GHz: 23 dBm; 5 GHz: 23 dBm
Power Input	IEEE 802.3at PoE on LAN 1; power adapter 12 V DC, 1.5 A
Power Consumption	PoE: < 12 W; power adapter: < 12 W
Maximum SSIDs	Up to 16 SSIDs per device, up to 8 per wireless band
Concurrent Clients	500+ concurrent Wi-Fi client devices
Management	Cloud-based (D-Lite), zero-touch deployment, over-the-air firmware upgrades
Dimensions	200.6 × 200.6 × 40 mm
Weight	491 g (without mount)
Operating Temperature	0 to 40 °C
Humidity	5% to 95% non-condensing
MTBF	> 400,000 hours
Mounting Options	Ceiling mount, wall mount, desktop (horizontal)
Certifications	CE Class B, FCC Class B, UL-2043, IC Class B

Specifications are summarised from the manufacturer's published information (checked 2026-11-02). They describe the cited version only. Confirm the exact model, suffix and supplied revision before ordering. ISD confirms supply, price, availability and warranty separately.

IS Distributions Sdn. Bhd., Kuching, Sarawak · https://www.isdsb.com.my/product-d-link-network-dla-x301.html