




Hikvision DS-3E0505P-E

· Specification summary

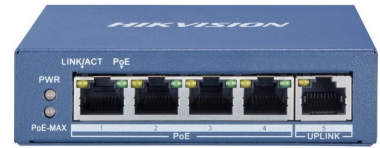

Management mode	The selected Gigabit table lists this model as unmanaged. Do not apply cloud or smart-managed software features from the EI/SI tables.
PoE access ports	The exact column lists four Gigabit PoE ports. It does not list four ports each able to deliver the whole switch budget.
RJ45 uplink	One Gigabit RJ45 uplink port is listed separately from the PoE access ports. No PoE output capability is inferred for the uplink.
PoE standards	802.3af and 802.3at are listed in this exact model column. Do not import 802.3bt from the generic brochure introduction.
Aggregate PoE budget	60 W is the listed whole-switch PoE budget. It is not a per-port rating, measured device consumption or a guarantee that every connected device can run at maximum power together.
Packet forwarding reference	7.44 Mpps is the manufacturer-listed forwarding-rate reference. Packet-size and test conditions are not stated here; it is not a guaranteed installed throughput.
Switching capacity reference	10 Gbps is the listed switching capacity. This is distinct from Mpps forwarding rate and individual Gigabit port speed.
Operating temperature	–10 to 55 °C is shown in the merged operating-temperature row of this unmanaged table. No outdoor IP rating or humidity limit is established by that row.

Specifications are summarised from the manufacturer's published information (checked 2026-10-20). They describe the cited version only. Confirm the exact model, suffix and supplied revision before ordering. ISD confirms supply, price, availability and warranty separately.

IS Distributions Sdn. Bhd., Kuching, Sarawak · <https://www.isdsb.com.my/product-hikvision-network-ds-3e0505p-e.html>