
Hikvision DS-KD-KK/S

Modular Video Intercom Nametag Module · Specification summary

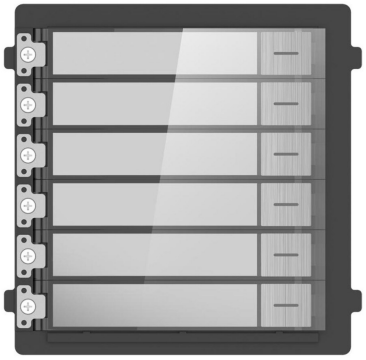

Call Buttons	6
Processor	Embedded high-performance processor
Network Protocol	TCP/IP and RTSP
Network Interface	1 RJ45 10/100 Mbps
RS-485 Interfaces	2
Protection Rating	IP65 and IK07
Power Supply	12 VDC
Power Consumption	0.8 W
Working Temperature	-40°C to 55°C
Dimensions	98.5 × 100 × 34.2 mm

Specifications are summarised from the manufacturer's published information (checked 2026-10-25). They describe the cited version only. Confirm the exact model, suffix and supplied revision before ordering. ISD confirms supply, price, availability and warranty separately.

IS Distributions Sdn. Bhd., Kuching, Sarawak · https://www.isdsb.com.my/product-hikvision-door-access-ds-kd-kk-s.html