
Hikvision DS-TMG520

Automatic Vehicle Barrier Gate · Specification summary

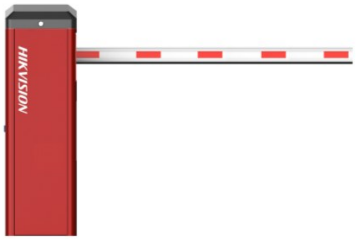

Barrier Housing	SECC, 2.0 mm thick (door 1.5 mm)
Boom Pole Installation Height	880 mm
Motor Type	DC brushless motor
Rising/Falling Speed (default)	DS-TMG520-H (3 m): 0.9 s / 3 s; DS-TMG520-M (4 m): 1.5 s / 3.5 s; DS-TMG520-L (6 m): 4 s / 6 s
Matched Boom Pole Type	Round 1 to 4 m; anti-collision octagonal 1 to 6 m; octagonal telescopic 4 to 6 m
Boom Pole Direction	Right by default, direction switchable
Working Voltage	220 VAC ± 15%
Consumption	300 W
Remote Controller Frequency	433 MHz
Number of Cycles	5,000,000
Temperature	-30 °C to 70 °C

Specifications are summarised from the manufacturer's published information (checked 2026-10-25). They describe the cited version only. Confirm the exact model, suffix and supplied revision before ordering. ISD confirms supply, price, availability and warranty separately.

IS Distributions Sdn. Bhd., Kuching, Sarawak · https://www.isdsb.com.my/product-hikvision-barrier-ds-tmg520.html