
Unitek V307A

2-Port HDMI 2.0 KVM Switch · Specification summary

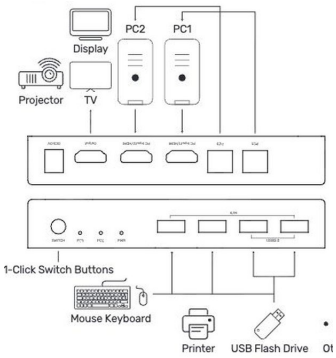

Ports	2 PC inputs (HDMI + USB-B each), 1 HDMI output
Protocol	HDMI 2.0; HDCP 2.2
HDMI data rate	18Gbps
Resolution	Up to 3840 × 2160@60Hz 4:4:4
HDMI ports	HDMI-A × 3 (2 input, 1 output)
HDMI cable	Less than 5 m at 1080p@60Hz
USB 2.0 ports	USB 2.0 × 2, type A
PC USB connectors	USB-B × 2
Keyboard / mouse ports	USB-A
Switching	Front panel buttons, keyboard hotkeys and mouse gesture
HDR	HDR10 and Dolby Vision
Power adapter	DC 5V
ESD protection	Human body model ±8kV (air-gap discharge)
Operating temperature	-5 °C to +70 °C
Humidity	5% to 90%
Dimensions	225 (L) × 67 (W) × 22 (H) mm

Specifications are summarised from the manufacturer's published information (checked 2026-11-02). They describe the cited version only. Confirm the exact model, suffix and supplied revision before ordering. ISD confirms supply, price, availability and warranty separately.

IS Distributions Sdn. Bhd., Kuching, Sarawak · https://www.isdsb.com.my/product-unitek-accessory-v307a.html